



ROOF PARAPET  
AT CORNER

12" X 12" REINFORCING  
FABRIC, CUT TO FIT  
INTO CORNER.

TAKE CUT UP TO TOP  
OF CANT DIMENSION

TOP OF FABRIC

START OF CUT

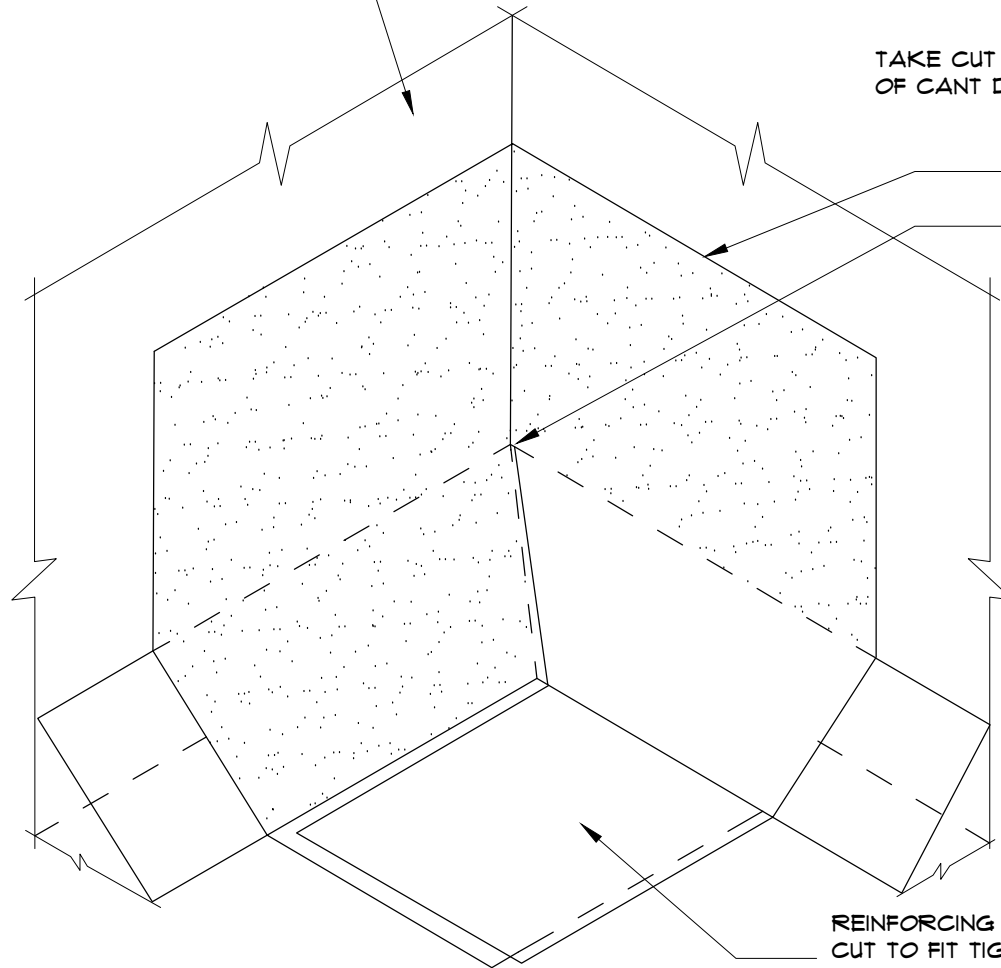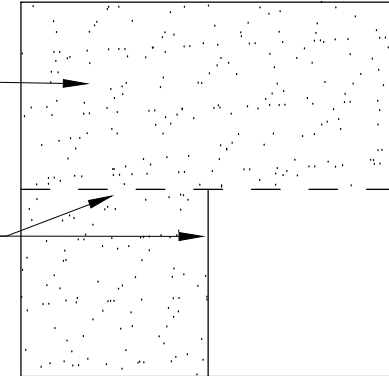

ISOMETRIC VIEW

REINFORCING FABRIC,  
CUT TO FIT TIGHT AT  
CANT AND TO  
OVERLAP ON ROOF.

NOTES:

1. FLUID APPLIED RESTORATION SYSTEM - BASE COAT, REINFORCED FABRIC, BASE COAT 2, AND FINISH COAT COMPONENTS
2. BASE COAT - COMBINED COVERAGE (2 COATS) AT A MINIMUM RATE AS DIRECTED IN THE SPECIFICATION.
3. EACH FINISH COAT SHALL BE APPLIED AT THE PRODUCT DATA SHEET RECOMMENDATIONS. ALLOW TO DRY BETWEEN COATS.
4. PRIMING - REFER TO TROPICAL ROOFING PRODUCTS SPECIFICATIONS FOR DECK PRIMING REQUIREMENTS.

NOTE: FOR SPECIFIC PRODUCT RECOMMENDATION REFER TO THE APPROPRIATE FLUID APPLIED SYSTEM GUIDE SPECIFICATIONS AT [WWW.TROPICALROOFINGPRODUCTS.COM](http://WWW.TROPICALROOFINGPRODUCTS.COM)



**FLUID APPLIED RESTORATION COATING SYSTEM**

**TYPICAL ROOF CANT (AT CORNER)  
FLASHING DETAIL**

DATE :

**12-13-16**

DETAIL NO :

**12**