


12" X 12" REINFORCING
FABRIC WITH PIPE
HOLE IN CENTER

REINFORCING
FABRIC PIPE WRAP

①



②


①

REINFORCING
FABRIC PIPE WRAP

PIPE THROUGH
ROOF DECK

6" HIGH
MINIMUM

ISOMETRIC VIEW

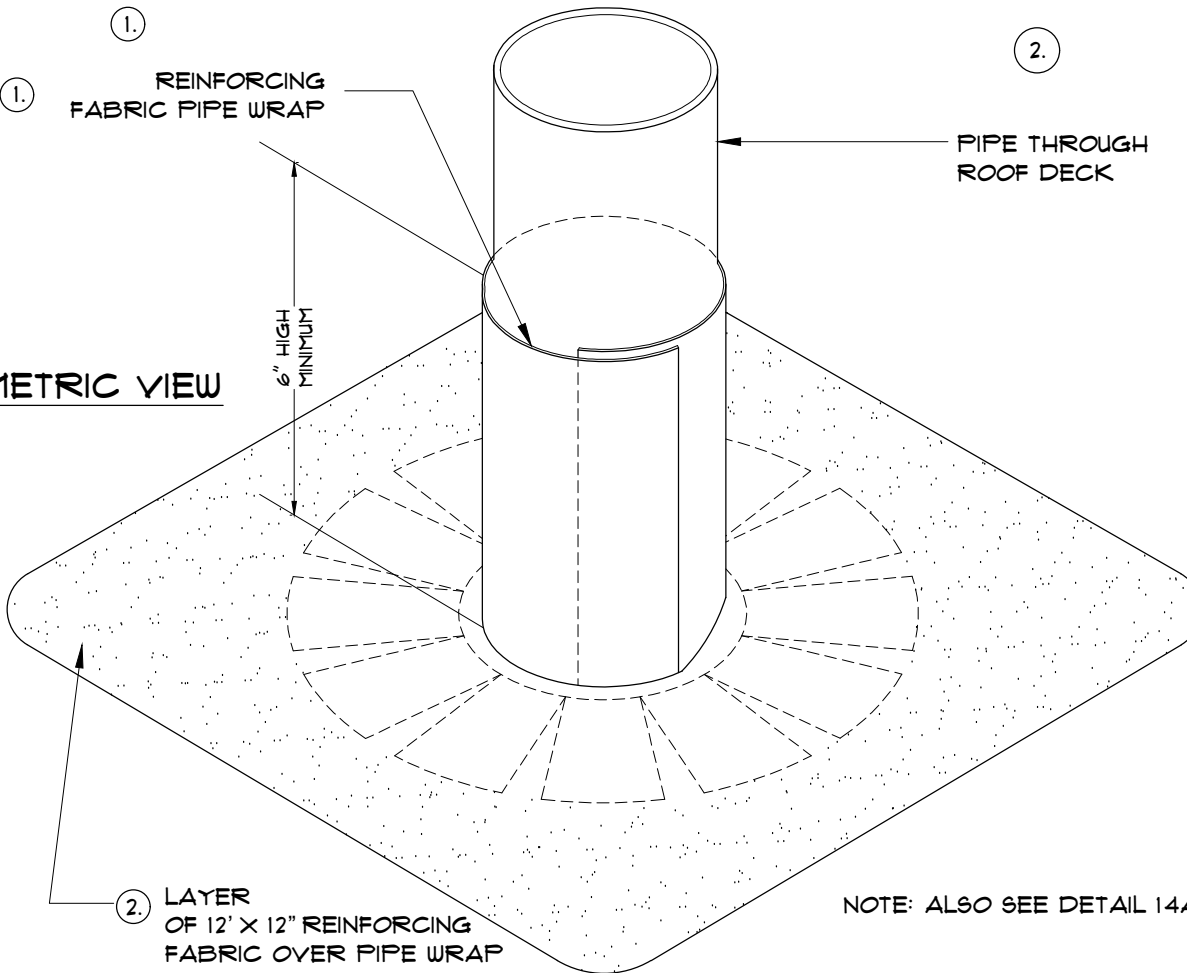

②

LAYER
OF 12" X 12" REINFORCING
FABRIC OVER PIPE WRAP

NOTE: ALSO SEE DETAIL 14A

NOTES:

1. FLUID APPLIED RESTORATION SYSTEM – BASE COAT, REINFORCED FABRIC, BASE COAT 2, AND FINISH COAT COMPONENTS
2. PRIMING – REFER TO TROPICAL ROOFING PRODUCTS SPECIFICATIONS FOR DECK PRIMING REQUIREMENTS.

NOTE: FOR SPECIFIC PRODUCT RECOMMENDATION REFER TO THE APPROPRIATE FLUID APPLIED SYSTEM GUIDE SPECIFICATIONS AT WWW.TROPICALROOFINGPRODUCTS.COM



FLUID APPLIED RESTORATION COATING SYSTEM

TYPICAL VENT PIPE FLASHING DETAIL

DATE :

12-13-16

DETAIL NO :

14b