


NOTES:

1. PREPARE ALL SURFACES IN ACCORDANCE WITH THE MANUFACTURER'S REQUIREMENTS.
2. ALL JOINTS SHALL BE TIGHT AND STABLE. ALL FASTENERS SHALL BE FLUSH WITH THE DECK.
3. FLUID APPLIED RESTORATION SYSTEM – BASE COAT, REINFORCED FABRIC, BASE COAT 2, AND FINISH COAT COMPONENTS
4. BASE COAT – COMBINED COVERAGE (2 COATS) AT MINIMUM RATE AS DIRECTED IN THE SPECIFICATION.
5. EACH FINISH COAT SHALL BE APPLIED AT THE PRODUCT DATA SHEET RECOMMENDATIONS. ALLOW TO DRY BETWEEN COATS.
6. PRIMING – REFER TO TROPICAL ROOFING PRODUCTS SPECIFICATIONS FOR DECK PRIMING REQUIREMENTS.

NOTE: FOR SPECIFIC PRODUCT RECOMMENDATION REFER TO THE APPROPRIATE FLUID APPLIED SYSTEM GUIDE SPECIFICATIONS AT WWW.TROPICALROOFINGPRODUCTS.COM

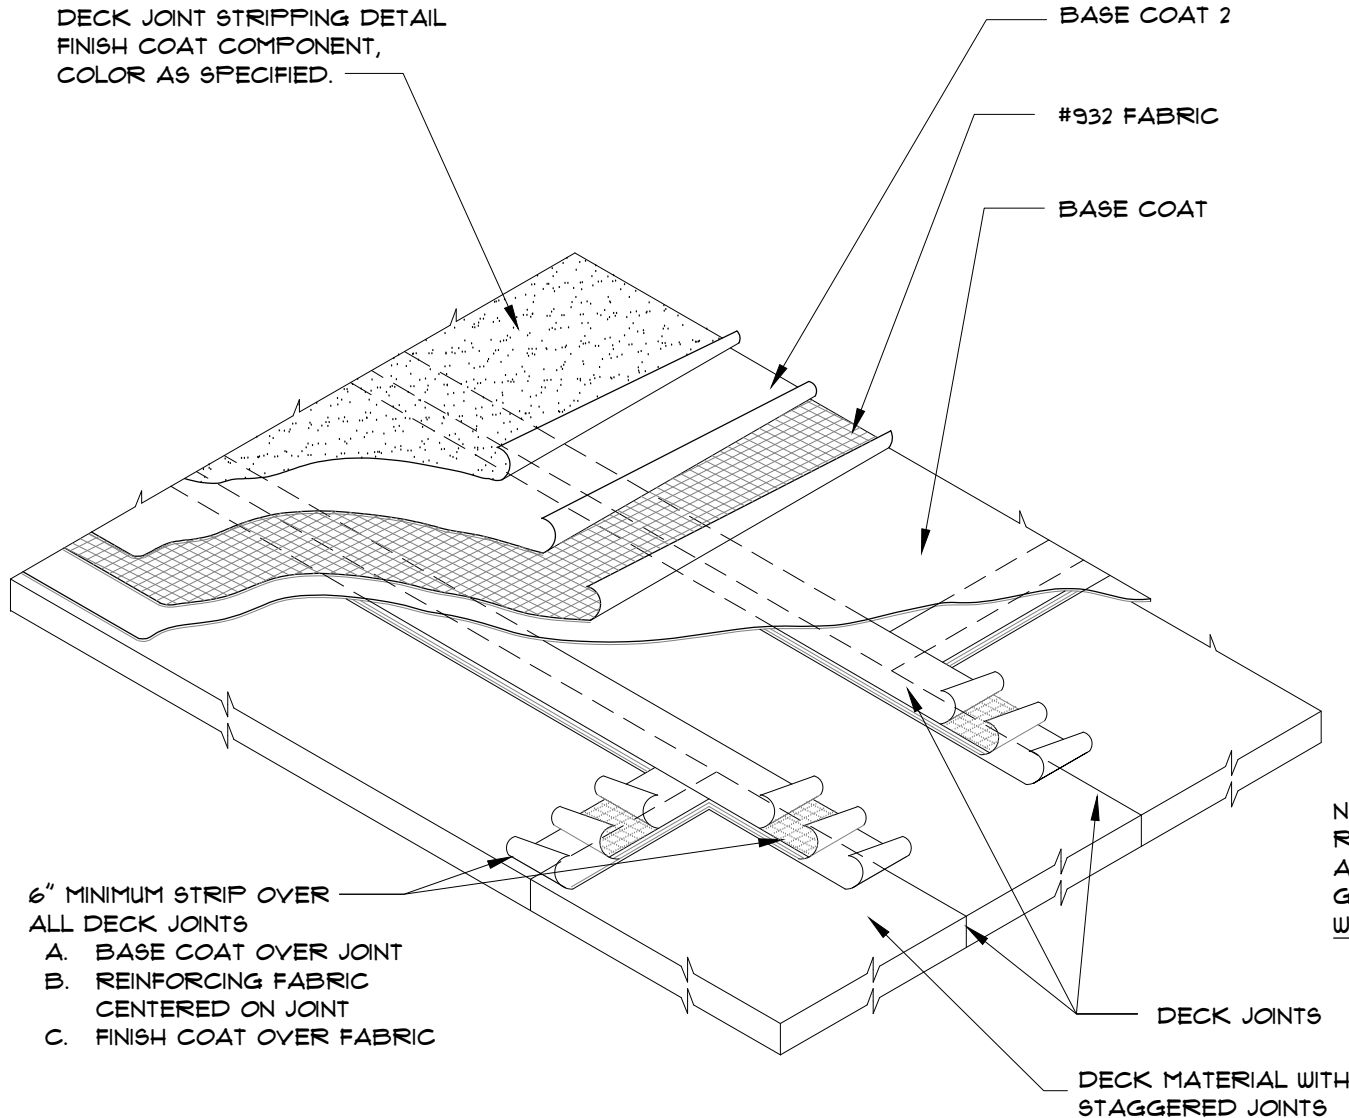

- 6" MINIMUM STRIP OVER ALL DECK JOINTS
- A. BASE COAT OVER JOINT
 - B. REINFORCING FABRIC CENTERED ON JOINT
 - C. FINISH COAT OVER FABRIC

FLUID APPLIED RESTORATION COATING SYSTEM

DECK JOINT STRIPPING DETAIL

DATE :

12-13-16

DETAIL NO :

4

