



# ALL WEATHER FLASHING CEMENT

ASTM D 4586 and D 3409



- Professional-Grade
- Buttery smooth texture
- Adheres to all surfaces wet or dry
- Will not sag, slip, or mud crack
- Ready to use

ASTM D 4586  
ASTM D 3409



FLORIDA  
1904 SW 31ST AVE  
HALLANDALE, FL 33009  
800.432.2855

CALIFORNIA  
14435 MACAW STREET  
LA MIRADA, CA 90638  
877.827.2622

TEXAS  
1225 BRAI DRIVE  
PORT ARTHUR, TX 77640  
866.727.0091



# ALL WEATHER FLASHING CEMENT

ASTM D4586 and D3409



**TROPICAL ROOFING PRODUCTS' #701 ALL WEATHER FLASHING CEMENT** is a contractor grade asphaltic base flashing cement that adheres to all surfaces wet or dry. Readily adheres to all prepared surfaces, and will not sag, slip, or mud crack. A multipurpose flashing cement for repairing leaks, cracked spots, holes in shingles, concrete, and steel or metal roofs. Can be used on all flashings around skylights, gutters, and in all crevices. Meets ASTM D 4586 and ASTM D 3409. Miami-Dade NOA Compliant.

**MAXIMUM V.O.C** ..... 250 G/L  
**WPG**.....8.7  
**FLASH POINT(T.C.C.)** .....105°F+  
**SERVICE TEMPERATURE**.....45°F& RISING  
**RESISTANCE TO ACIDS, ALKYDS**.....EXCELLENT  
**CONSISTENCY**.....THICK SOFT MASTIC




## APPLICATION TOOLS

Trowel, Putty Knife or Gloved Hand



IDEAL ON ALL FLASHINGS INCLUDING AROUND SKYLIGHTS, GUTTERS, AND ALL CREVICES. CAN BE USED ON ALL FLASHING PENETRATIONS.

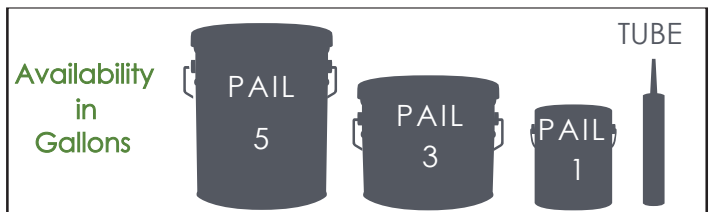

**CAUTION! COMBUSTIBLE!** Contains petroleum distillate. Keep away from heat and flame. USE ONLY WITH ADEQUATE VENTILATION! Avoid contact with skin and breathing of vapor. CLOSE AIR INTAKES on roof until solvents dissipate. KEEP OUT OF REACH OF CHILDREN. Close container after each use. DO NOT TAKE INTERNALLY! If swallowed, do not induce vomiting. CALL PHYSICIAN IMMEDIATELY! Contains volatile solvents that might contaminate potable water