




COLD PROCESS LAP CEMENT

ASTM D 3019



- high grade, fibered, asphalt lap cement, adhesive
- Fortified with reinforcing fibers
- Unsurpassed resiliency and durability
- Forms tough, flexible, adhesive and cohesive film
- Meets all the requirements of ASTM D 3019

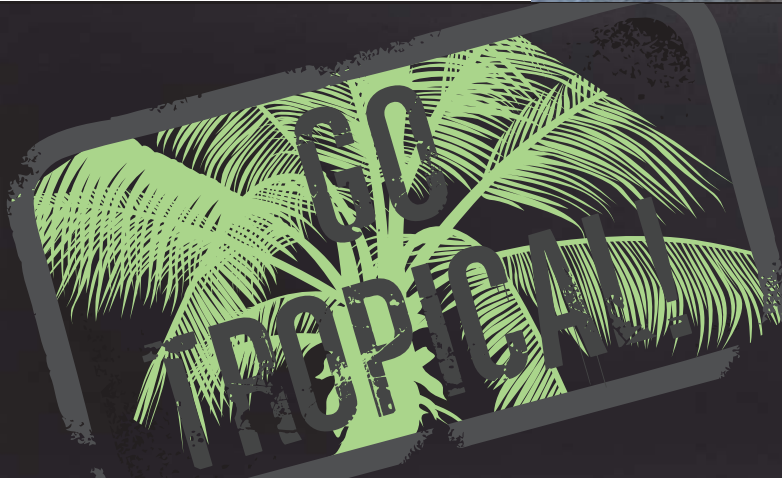

FLORIDA
1904 SW 31ST AVE
HALLANDALE, FL 33009
800.432.2855

CALIFORNIA
14435 MACAW STREET
LA MIRADA, CA 90638
877.827.2622

TEXAS
1225 BRAI DRIVE
PORT ARTHUR, TX 77640
866.727.0091



COLD PROCESS LAP CEMENT

ASTM D 3019



TROPICAL ROOFING PRODUCTS' #711 Cold-Process Lap Cement is a high grade, fibered, asphalt solvent blend of medium brushing consistency that is recommended as a lap cement, adhesive for use with rolled roofing membranes, and blind-nailing overlap applications. Minimizes the risk of wrinkles, blisters and other problems. May also be used for bonding gravel or granule surfacing for built-up roofing systems. Meets and exceeds all the requirements of ASTM D 3019, Type-3. Miami-Dade NOA.



MAXIMUM V.O.C.....	250 G/L
CONSISTENCY	THICK SOFT MASTIC
WPG.....	8.7 LBS.
FLASH POINT (T.C.C.)	105°F
SERVICE TEMP.....	40°F - 90°F
RESISTANCE TO ACIDS, ALKYDS.....	EXCELLENT

APPLICATION TOOLS

Heavy Duty Sprayer, Heavy Duty Paint Roller, or Squeegee



IDEAL FOR APPLYING ON SBS MODIFIED BITUMEN SHEETS, GLASS BASE PLYS, AS A LAP CEMENT, OR AS AN EXTREMELY HIGH QUALITY ROOF ADHESIVE

	DRUM	PAIL
Availability in Gallons	55	5

CAUTION! COMBUSTIBLE: Contains petroleum distillate. Keep away from heat and flame. USE ONLY WITH ADEQUATE VENTILATION! Avoid contact with skin and breathing of vapor. CLOSE AIR INTAKES on roof until solvents dissipate. KEEP OUT OF REACH OF CHILDREN. Close container after each use. DO NOT TAKE INTERNALLY! If swallowed, do not induce vomiting. CALL PHYSICIAN IMMEDIATELY! Contains volatile solvents that might contaminate potable water