



SEBS ELASTOMERIC FLASHING MASTIC



- Solvent based flashing grade elastomeric designed for fast curing
- Excellent reflectivity
- Exceptional elongation properties & cold weather pliability
- Excellent weather, chemical, and water resistance
- Exceptional sealant for horizontal and vertical seams, screw heads, fasteners and joints on a metal roofing system
- Excellent as pitch pan filler
- Versatile patch and repair product over most surfaces



FLORIDA
1904 SW 31ST AVE
HALLANDALE, FL 33009
800.432.2855

CALIFORNIA
14435 MACAW STREET
LA MIRADA, CA 90638
877.827.2622

TEXAS
1225 BRAI DRIVE
PORT ARTHUR, TX 77640
866.727.0091



SEBS ELASTOMERIC FLASHING MASTIC



TROPICAL ROOFING PRODUCTS' #975 SEBS ELASTOMERIC FLASHING MASTIC is a single component block copolymer elastomeric mastic that forms a tough and durable elastomeric membrane. Exceptional elongation properties, cold weather pliability, excellent weather and water resistance, good chemical resistance, and is highly reflective. Works great to patch and repair properly prepared existing EPDM, APP, SBS, BUR, PVC, Hypalon, fiberglass, concrete, and wood. Makes an excellent sealant for horizontal and vertical seams and joints in a metal roofing system.

MAXIMUM V.O.C.....	550 G/L
ELONGATION	875%
PERMEANCE	1.3
VISCOSITY @ 77 F, CONE PEN.....	240 DDM
DENSITY(WPG).....	9.7 lbs/gal
AVERAGE CURE TIME.....	12-24 Hours




APPLICATION TOOLS Trowel, Putty Knife, Brush



IDEAL ON ALL FLASHINGS & REPAIR OVER NEW & EXISTING METAL, STEEL, CONCRETE, ALUMINUM, BRICK, POLYURETHANE, WOOD, FIBERGLASS, APP, SBS, MODBIT, BUR and SINGLE PLY SURFACES.

Availability
in Gallons

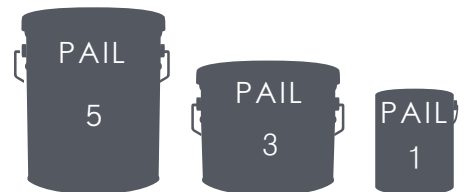

CAUTION! COMBUSTIBLE! KEEP OUT OF REACH OF CHILDREN. Close container after each use. DO NOT TAKE INTERNALLY! If swallowed, do not induce vomiting. CALL PHYSICIAN IMMEDIATELY!