




FIBERED ASPHALT EMULSION

ASTM D1227, Type II, Class I



- Designed for coating on most roof surfaces
- Environmentally friendly water based formula
- Cold applied
- Corrosion resistant
- Does not crack, alligator, run or sag

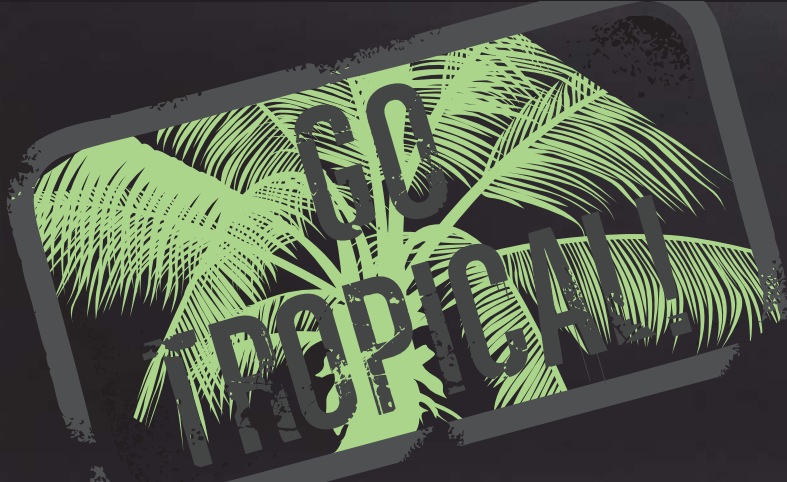

FLORIDA
1904 SW 31ST AVE
HALLANDALE, FL 33009
800.432.2855

CALIFORNIA
14435 MACAW STREET
LA MIRADA, CA 90638
877.827.2622

TEXAS
1225 BRAI DRIVE
PORT ARTHUR, TX 77640
866.727.0091



FIBERED ASPHALT EMULSION

ASTM D 1227, Type II, Class I



TROPICAL ROOFING PRODUCTS' #363 FIBERED EMULSION is a fiber reinforced water based roof and waterproof coating that is solvent free. Ideal for use as a surface coating for built-up roofing, metal, masonry surfaces, and for pipes and tanks above or below ground level. Will not run, sag, crack, or "alligator" under most weather conditions. Meets and exceeds all the requirements of ASTM D 1227, Type II, Class I. Miami-Dade NOA Compliant.



MAXIMUM V.O.C30 G/L
 TOTAL SOLIDS.....43%
 WPG (Nominal).....8.2-8.7
 APPLICATION TEMPERATURE.....45° F & RISING
 CURING TIME.....12-72 HOURS

APPLICATION TOOLS

Heavy Duty Sprayer, Heavy Duty Paint Roller, Brush



Waterproofing fibered compound for cold process, built-up roof systems, metal roofing, masonry, stucco, parapet walls, curbs and base flashings. Damp Proofing compound for below grade walls and base coat for elastomeric reflective coating

TANKER



Availability in Gallons

TOTE

DRUM

PAIL

275
or
330

55

5

CAUTION: DO NOT TAKE INTERNALLY! KEEP OUT OF REACH OF CHILDREN. Use protective measures to avoid contact with eyes and skin. If swallowed, CALL PHYSICIAN IMMEDIATELY! In case of eye contact, open eyelids wide and flush immediately with plenty of water for at least 15 minutes. GET MEDICAL ATTENTION!